

TRUST OVERSEAS GROUP COMPANY PROFILE

WWW.TRUSTOSG.COM

LET LIFE LIT



HISTORY

TRUST OVERSEAS GROUP Company was Established in May 2013 With its **TRUST LED** Brand , We have always challenged ourselves on not just being a “provider of lighting products” but to be a “lighting solutions provider” , This achieved by raising the efficiency for our Technical Staff , As the company grew we worked to maintain and improve our place as a leader in the marketplace. We take a focused approach to being a pioneer in the lighting industry while constantly looking for the newest products and technology. We strive to provide the best in class lighting solutions by building of our success with involvement in some of the area’s largest Places such as ABB, HILTON, TOSHIBA ELARABY, CERAMIC CLEOPATRA, ORASCOM, ELSEWEDY Cables and many commercial projects. **TRUST LED** luminaries is powered by SAMSUNG , PHILIPS LED CHIPS , leading us become an energy-saving, and Power solution provider in both indoor and outdoor segment in order to fit for the change in government regulation Mind.

STRATEGY

AT **TRUST LED** we are not here for Quick Sale, we are doing our best to produce High Quality products, We focus on empowering Customers through education and providing lighting industry and product information, they will understand all of available lighting Solutions with this knowledge they can Choose lighting design that provides the best possible outcome measured by performance and value.

VISION

It is estimated that the LED lighting will contribute around 85% of the total lighting business in 2022. **TRUST LED** was established to focus on LED lighting business since we truly believe that it is the way of the future.

Line of Business

◇ Lighting

- Flood Light
- Street Light
- High Bay Light
- Panel Light
- Down Light
- Bulb Light

Trust Overseas Group

76 Saad Zaghlol., St Shebin Al-kom – Egypt.
Tel: + 201000681022 -Mobile: +201000148303
Email: info@trustosg.com

Guangzhou Trust Overseas Lighting Tech Co.,LTD

D19, Room2304, NO.559, Tianhe North Road Tianhe,
District, Guangzhou City, China
Mobile: +8618520470711
Email: info@trustosg.com – sales1@trustosg.com

Partners of Success 2024

2014 : 2024



Trust Overseas Group
Trust LED
GTO





Client Logo	Client Name
	ABB for Electrical Industries (ABB Arab) S.A.E.
	Egyptian German Automotive co. – Mercedes Egypt.
	Vodafone Egypt Telecommunications
	Electrical Equipment & Cables Co.
	Pepsi Cola Egypt
	Halwani Bros
	Harvest Foods Co.
	Orascom Construction PLC (ORAS)
	El Araby Co. for Trading & Manufacturing
	Ceramica Cleopatra Group
	Al Masrya for household cleaners (Clorox)
	Sesco Trans
	Eastern Co S.A.E

	Fresh Electric for Home Appliances
	French cookware and small appliance manufacturer
	The Arab Contractors (Osman Ahmed Osman & Co.)
	UNIPAKNILE Ltd
	Coca-Cola Egypt
	Hilton Ramses
	Trade for Egypt LLC - Vivo
	Agthia Group PJSC - Food and beverage company
	GlassRock Insulation co
	Procter & Gamble
	Oriental Weavers Complex
	Badawy Group – For Food Industries (beko)
	Jade Textile
	Egyptian Saudi Food Industries Company - ESFIC

	Aviation Club
	All food sweets (Tsepass)
	EMAC Construction
	Green Hills Club
	Sphinx Glass: Glass Manufacturing Company
	Egyptian Shooting Club
	Pyramids Poultry
	Saudi Egyptian Salts and Minerals Sico Salt
	Middle East Formica Manufacturing
	Arma Food Industries
	El Marakby Steel for Metallic Industries
	Petroleum Pipelines Company
	Hesni Textile
	Ever Green
	Egypt for Electrical and Mechanical Industries (Mimico)

TRUST OVERSEAS GROUP OUR PRODUCTS

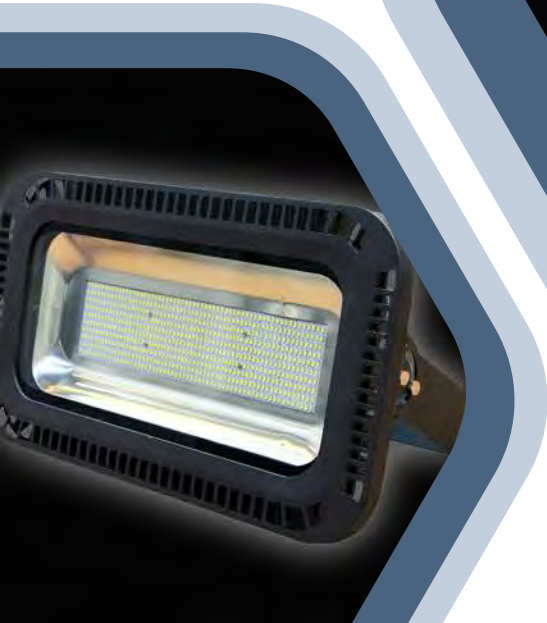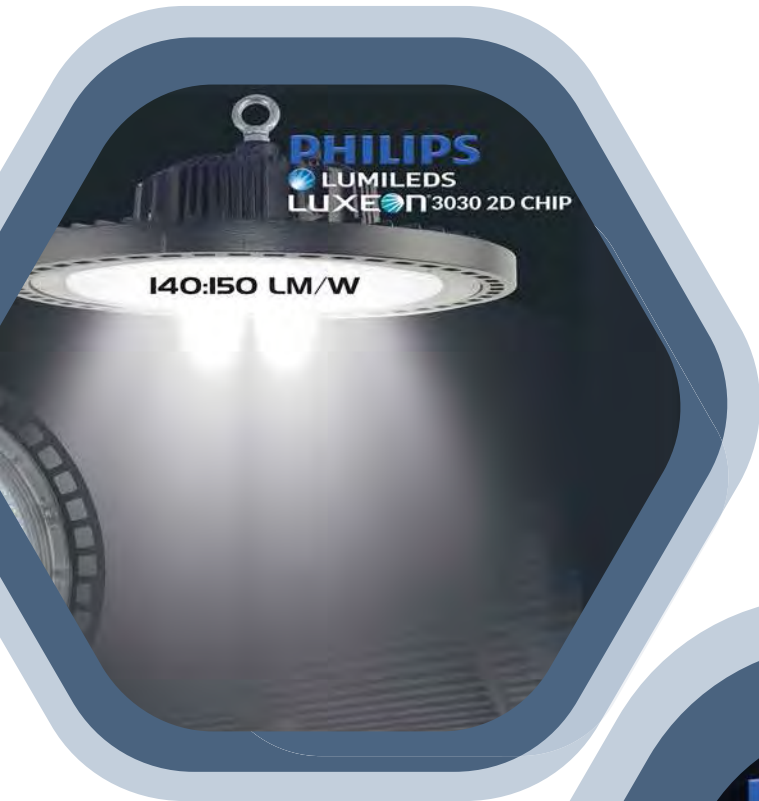

Trust LED FLOOD LIGHT

PRODUCT DESCRIPTION

Trust LED Flood light 50W small Epistar



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1200 Gm

Model No.	TST-TGS018-50W
Power	50 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	90 : 105 Lm/W (5250 LM)
LED Type	SMD
LED Brand	EPISTAR
Number of Chips	110 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 77
Dimension	283 * 273 * 63 mm

PRODUCT DESCRIPTION

Trust LED Flood light 50W big Epistar



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1680 Gm

Model No.	TST-TGS019-50W
Power	50 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 : 110 Lm/W (5500 LM)
LED Type	SMD
LED Brand	EPISTAR
Number of Chips	110 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 77
Dimension	283 * 273 * 63 mm

PRODUCT DESCRIPTION

Trust LED Flood light 100W Epistar



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 2380 Gm

Model No.	TST-TGS022/08-100W
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	90 : 105 Lm/W (10500 LM)
LED Type	SMD
LED Brand	EPISTAR
Number of Chips	220 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 77
Dimension	285 * 285 * 90 mm

Trust LED FLOOD LIGHT

PRODUCT DESCRIPTION

Trust LED Floodlight 50W-Grey Epistar



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1800 Gm

Model No.	SL-TG5064
Power	50 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 Lm/W (5000 LM)
LED Type	SMD
LED Brand	EPISTAR
Number of Chips	60 Pcs
Protection	IP 66
Color Temp	6000 : 6760 K
Life Span	50000 Hrs
CRI	>= 80
Dimension	266 * 295 * 68 mm

PRODUCT DESCRIPTION

Trust LED Floodlight 100W-Grey Epistar



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 3500 Gm

Model No.	SL-TG10064
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 Lm/W (10000 LM)
LED Type	SMD
LED Brand	EPISTAR
Number of Chips	120 Pcs
Protection	IP 66
Color Temp	6000 : 6760 K
Life Span	50000 Hrs
CRI	>= 80
Dimension	283 * 273 * 63 mm

PRODUCT DESCRIPTION

Trust LED Floodlight 600W-Grey Epistar



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 16800 Gm

Model No.	SL-TG60064
Power	600 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 Lm/W (60000 LM)
LED Type	SMD
LED Brand	EPISTAR
Number of Chips	720 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	

Trust LED Mini High Bay LIGHT

PRODUCT DESCRIPTION

Trust LED Mini Highbay 60W Epistar



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 360 Gm

Model No.	TST-MHB-60W
Power	60 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 : 110 Lm/W (6600 LM)
LED Type	SMD 2835 3 x 50 PCS
LED Brand	EPISTAR
Number of Chips	150 Pcs
Protection	IP 65
Color Temp	6000 K
Life Span	30000 Hrs
CRI	>= 80
Dimension	

PRODUCT DESCRIPTION

Trust LED Mini Highbay 80W Epistar



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 480 Gm

Model No.	TST-MHB-80W
Power	80 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 : 110 Lm/W (8800 LM)
LED Type	SMD 2835 4 x 50 PCS
LED Brand	EPISTAR
Number of Chips	200 Pcs
Protection	IP 65
Color Temp	6000 K
Life Span	30000 Hrs
CRI	>= 80
Dimension	

PRODUCT DESCRIPTION

Trust LED Mini Highbay 120W Epistar



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 780 Gm

Model No.	TST-MHB-120W
Power	120 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 : 110 Lm/W (13200 LM)
LED Type	SMD 2835 6 x 50 PCS
LED Brand	EPISTAR
Number of Chips	300 Pcs
Protection	IP 65
Color Temp	6000 : 6500 kelvin
Life Span	30000 Hrs
CRI	>= 80
Dimension	

Trust LED FLOOD LIGHT

PRODUCT DESCRIPTION

Trust LED Flood light 100W Samsung



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 3400 Gm

Model No.	TST-TGS009-100W
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	130 : 140 Lm/W (14000 LM)
LED Type	SMD 5630
LED Brand	SAMSUNG
Number of Chips	240 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	370 * 255 * 135 mm

PRODUCT DESCRIPTION

Trust LED Flood light 150W Samsung



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 4770 Gm

Model No.	TST-TGS022-150W
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	130 : 140 Lm/W (21000 LM)
LED Type	SMD 5630
LED Brand	SAMSUNG
Number of Chips	400 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	455 * 315 * 160 mm

PRODUCT DESCRIPTION

Trust LED Flood light 250W Samsung



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 8650 Gm

Model No.	TST-TGS023-250W
Power	250 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	130 : 140 Lm/W (35000 LM)
LED Type	SMD 5630
LED Brand	SAMSUNG
Number of Chips	600 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	530 * 320 * 190 mm

Trust LED FLOOD LIGHT

PRODUCT DESCRIPTION

Trust LED Flood light 400W Samsung



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 11360 Gm

Model No.	TST-TGS024-400W
Power	400 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	130 : 140 Lm/W (56000 LM)
LED Type	SMD 5630
LED Brand	SAMSUNG
Number of Chips	960 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	670 * 320 * 200 mm

PRODUCT DESCRIPTION

Trust LED Flood light 600W Samsung



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 15500 Gm

Model No.	TST-TGS026-600W
Power	600 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	130 : 140 Lm/W (84000 LM)
LED Type	SMD 5630
LED Brand	SAMSUNG
Number of Chips	1440 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	850 * 320 * 200 mm

PRODUCT DESCRIPTION

Trust LED Flood light 100W Philips



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +60 °C
Weight: 2160 Gm

Model No.	TST-TGS010-100W
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (15000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	120 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	305 * 285 * 50 mm

Trust LED FLOOD LIGHT

Trust LED Flood light 150W Philips



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +60 °C
Weight: 3520 Gm

PRODUCT DESCRIPTION

Model No.	TST-TGS011-150W
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (30000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	180 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	360 * 340 * 50 mm

Trust LED Flood light 150W Philips Meanwell Drv



Mean Well Driver

Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +90 °C
Weight: 3620 Gm

PRODUCT DESCRIPTION

Model No.	TST-TGS011-150W-MWD
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (30000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	180 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	360 * 340 * 50 mm

Trust LED Flood light 200W Philips



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +60 °C
Weight: 4560 Gm

PRODUCT DESCRIPTION

Model No.	TST-TGS012-200W
Power	200 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (22500 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	180 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	360 * 340 * 50 mm

GTO LED FLOOD LIGHT

PRODUCT DESCRIPTION

GTO LED Floodlight 100W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1300 Gm

Model No.	GTO-TGS10-100W
Power	100 W
Voltage	165 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	120 : 130 Lm/W (13000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	120 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	280 * 250 * 50 mm

PRODUCT DESCRIPTION

GTO LED Floodlight 150W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1630 Gm

Model No.	GTO-TGS12-150W
Power	150 W
Voltage	165 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	120 : 130 Lm/W (19500 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	180 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	320 * 280 * 50 mm

PRODUCT DESCRIPTION

GTO LED Floodlight 200W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 2200 Gm

Model No.	GTO-TGS13-200W
Power	200 W
Voltage	165 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	120 : 130 Lm/W (26000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	240 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	350 * 310 * 60 mm

Trust LED High Bay LIGHT

Trust LED HB 100W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 2280 Gm

PRODUCT DESCRIPTION

Model No.	TST-GKS002-100W
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (14000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	120 Pcs
Protection	IP 54
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 450 * 450 * 330 mm

Trust LED HB 150W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 2570 Gm

PRODUCT DESCRIPTION

Model No.	TST-GKS003-150W
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (21000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	180 Pcs
Protection	IP 54
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 450 * 450 * 360 mm

Trust LED HB 2000W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 3560 Gm

PRODUCT DESCRIPTION

Model No.	TST-GKS004-200W
Power	200 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (28000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	240 Pcs
Protection	IP 54
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 500 * 500 * 400 mm

Trust LED UFO High Bay LIGHT

PRODUCT DESCRIPTION

Trust LED UFO 100W Flower Philips



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +60 °C
Weight: 2380 Gm

Model No.	TST-UFO100W
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (15000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	120 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 300 * 150 * 50 mm

PRODUCT DESCRIPTION

Trust LED UFO 150W Flower Philips



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +60 °C
Weight: 4000 Gm

Model No.	TST-UFO150W
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (22500 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	180 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 365 * 160 * 55 mm

PRODUCT DESCRIPTION

Trust LED UFO 200W Flower Philips



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +60 °C
Weight: 5870 Gm

Model No.	TST-UFO200W
Power	200 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	140 : 150 Lm/W (30000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	240 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 420 * 170 * 65 mm

Trust LED UFO Slim High Bay LIGHT

PRODUCT DESCRIPTION

Trust LED UFO Slim 100W Flower Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1920 Gm

Model No.	TST-SLM/UFO-100W
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	140 : 150 Lm/W (15000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	140 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 295 * H 145 mm

PRODUCT DESCRIPTION

Trust LED UFO Slim 150W Flower Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 2550 Gm

Model No.	TST-SLM/UFO-150W
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	140 : 150 Lm/W (22500 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	210 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 310 * H 120 mm

PRODUCT DESCRIPTION

Trust LED UFO Slim 150W Flower Philips



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +90 °C
Weight: 2650 Gm

Mean Well Driver

Model No.	TST-SLM/UFO-150W
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	140 : 150 Lm/W (22500 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	210 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 310 * H 120 mm

Trust LED UFO Slim 200W Flower Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 3000 Gm

PRODUCT DESCRIPTION

Model No.	TST-SLM/UFO-200W
Power	200 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	140 : 150 Lm/W (30000 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	280 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	φ 310 * H 125 mm

Trust LED Street LIGHT

Trust LED Street light 100W Samsung



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 4300 Gm

PRODUCT DESCRIPTION

Model No.	TST-TGS025-100W
Power	100 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	130 : 140 Lm/W (14000 LM)
LED Type	SMD 5630
LED Brand	SAMSUNG
Number of Chips	240 Pcs
Protection	IP 66
Color Temp	4000 : 4500 K
Life Span	50000 Hrs
CRI	>= 80
Dimension	550 * 250 * 70 mm

Trust LED Street light 150W Samsung



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 4500 Gm

PRODUCT DESCRIPTION

Model No.	TST-TGS027-150W
Power	150 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	130 : 140 Lm/W (21000 LM)
LED Type	SMD 5630
LED Brand	SAMSUNG
Number of Chips	330 Pcs
Protection	IP 66
Color Temp	4000 : 4500 K
Life Span	50000 Hrs
CRI	>= 80
Dimension	

Trust LED Street LIGHT

PRODUCT DESCRIPTION

Trust LED Street light 355W



Beam angle: 90 degrees
Ambient temperature range -40 °C ~ +60 °C
Weight: Gm

Model No.	TST-ML8335
Power	335 W
Voltage	85 : 305 V
Frequency	50 Hz
Power Factor	>= 98%
Luminous Efficiency	Up to 160 lm/W (53600 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
cover type Optical	Acrylate micro-lens optic
Protection	IP 66
Color Temp	4000 : 4500 K
Life Span	50000 Hrs
CRI	>= 80
Dimension	783 * 316 * 75 mm

PRODUCT DESCRIPTION

Trust LED Street light 100W-Grey



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 3240 Gm

Model No.	SL-LD10022
Power	100 W
Voltage	100 : 265 V
Frequency	50 / 60 Hz
Power Factor	>= 97%
Luminous Efficiency	130 : 140 Lm/W (14000 LM)
LED Type	COB
LED Brand	EPISTAR
Number of Chips	2 COB Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	

PRODUCT DESCRIPTION

Trust LED Street light 150W-Grey



Beam angle: 120 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 4430 Gm

Model No.	SL-LD15022
Power	150 W
Voltage	100 : 265 V
Frequency	50 / 60 Hz
Power Factor	>= 97%
Luminous Efficiency	130 : 140 Lm/W (21000 LM)
LED Type	COB
LED Brand	Epistar
Number of Chips	3 COB Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	

GTO LED Street Light 100W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1400 Gm

PRODUCT DESCRIPTION

Model No.	GTO-STLIO-100W
Power	100 W
Voltage	100 : 265 V
Frequency	50 / 60 Hz
Power Factor	>= 97%
Luminous Efficiency	125 Lm/W (I2500 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	120 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	30000 Hrs
CRI	>= 80
Dimension	

GTO LED Street LIGHT

GTO LED Street Light 150W Philips



Beam angle: 90 degrees
Ambient temperature range -5 °C ~ +60 °C
Weight: 1880 Gm

PRODUCT DESCRIPTION

Model No.	GTO-STLII-150W
Power	150 W
Voltage	100 : 265 V
Frequency	50 / 60 Hz
Power Factor	>= 97%
Luminous Efficiency	125 Lm/W (I8750 LM)
LED Type	SMD 3030
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	150 Pcs
Protection	IP 66
Color Temp	6000 : 6500 kelvin
Life Span	30000 Hrs
CRI	>= 80
Dimension	

LED Panel and Tube LIGHT

Trust 60*60 Back light Panel 44W Philips



Beam angle: 120 degrees
Ambient temperature range -20 °C ~ +40 °C
Weight: 1520 Gm

PRODUCT DESCRIPTION

Model No.	TST-PBL006-44W
Power	44 W
Voltage	220 : 240 V
Frequency	50 / 60 Hz
Power Factor	>= 90%
Luminous Efficiency	120 Lm/W (5280 LM)
LED Type	SMD 2835 with Philips Driver
LED Brand	Lumileds Luxon 2D PHILIPS
Number of Chips	48 Pcs
Protection	IP 40
Color Temp	6000 : 6500 kelvin
Life Span	50000 Hrs
CRI	>= 80
Dimension	600 * 600 * 30 mm

Trust LED T8 Tube light NANO Epistar



Beam angle: 160 to 325 degrees
Ambient temperature range -20 °C ~ +40 °C

PRODUCT DESCRIPTION

Model No.	TST-DG5007-18W nano
Power	18 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 : 110 Lm/W (1980 LM)
LED Type	SMD 2835
LED Brand	EPISTAR
Number of Chips	96 Pcs
Protection	IP 20
Color Temp	6000 : 6500 kelvin
Life Span	30000 Hrs
CRI	>= 80
Dimension	1200 mm

Trust LED T8 Tube light PC-Alum Epistar



Beam angle: 160 to 325 degrees
Ambient temperature range -20 °C ~ +40 °C

PRODUCT DESCRIPTION

Model No.	TST-DG5009-20W
Power	20 W
Voltage	85 : 265 V
Frequency	50 Hz
Power Factor	>= 97%
Luminous Efficiency	100 : 110 Lm/W (2200 LM)
LED Type	SMD 2835
LED Brand	EPISTAR
Number of Chips	96 Pcs
Protection	IP 40
Color Temp	6000 : 6500 kelvin
Life Span	30000 Hrs
CRI	>= 80
Dimension	1200 mm

WaterProof LED Fixture

Trust Waterproof LED Fixture 2*120



Ambient temperature range -25°C ~ 50°C
Weight: 1700 Gm

PRODUCT DESCRIPTION

Model No.	TST-WP-120
Power	0 W
Voltage	85 : 265 V
Frequency	50 / 60 Hz
Protection	IP65
Dimmable	No
Linkable	Yes
Material	ABS, Polycarbonate
Certificate	CE, EMC, RoHS
Dimensions	1272 x 66 x 73 mm
Warranty	3 Years